

GENEE SYNC



The SYNC is an ideal solution for any organisation that uses Bring Your Own Device


Genee Sync is a bring-your-own-device (BYOD) tool that wirelessly syncs multiple computers or mobile devices to a single presentation screen, enabling up to 64 users to take turns in giving presentations.

In collaboration mode, four users can interact with the touchscreen or whiteboard simultaneously, with content from all their devices being displayed on the main viewscreen.


Supporting full-HD, and Mac and Windows compatible, Genee Sync can be connected to any touchscreen, projector, display or TV with an HDMI or VGA input.

Key features and benefits

- + Turns any display with a VGA or HDMI input into a wireless and/or networked display
- + USB port for interactive displays or interactive whiteboards
- + Provide conference control to effortlessly switch presenters for seamless business collaboration or teachers can wirelessly connect their students' laptops and choose which students can display their work
- + Fast and clean reproductions of video and audio even at 1080P at 30 fps
- + Genee Sync can work as a network access point, which allows any wireless enabled device to connect, present and/or access corporate network resources or just the internet

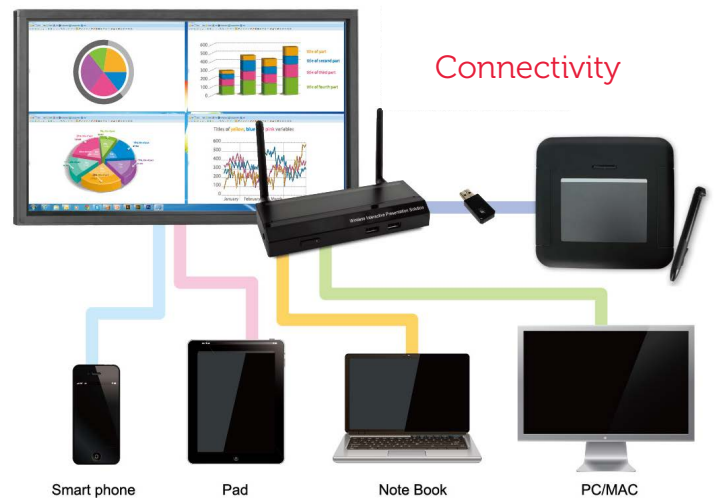

Device input/

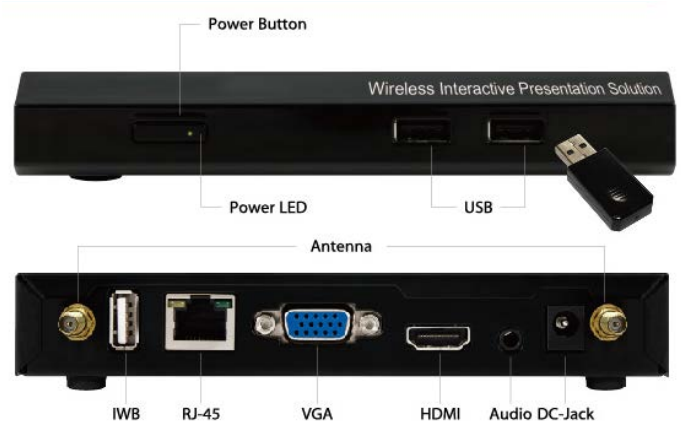

01902 390878



enquiries@geneeworld.com



www.geneeworld.com

GENEE SYNC



Model Name	Genee Sync
Standards	IEEE 802.11b/g/n 2.4GHz, IEEE 802.3(10BASE.T)/ IEEE802.3u(100BASE-TX)
Data rate	Wireless: Up to 300Mbps
Protocol	TCP/IP, SNMP
IP configuration	Automatic: DHCP, Manual: Static IP address
Security	IEEE Standard 64/128 bit WEP, WPA/WPA2-PSK, WPA/WPA2- Enterprise
Receive sensitivity	802.11b: -76 dBm: -67dBm 802.11n: 65M HT20 -64dBm, 150M HT40 -61dBm
Wireless link coverage	Up to 300 feet/100 meters, depends on environment
Supported PC/laptop Resolution	SVGA (800x600)/XGA (1024x768)/SXGA (1280x1024) WXGA (1280x768)/WSXGA (1440x900, 1600x1024)/UXGA (1600x1200) WUXGA (1920x1200)/QXGA (2048x1536)/Others
Supported output Resolution	VGA: SVGA (800x600)/XGA (1024x768)/ WXGA (1280x768)/WXGA+(128 0x800)/1360*768/1440*900/1600*1200 HDMI: 1280x720 (720P), 1920x1080 (1080i/1080p)
Supported windows Account right	Administrators, Limited User, Guest
Supported operation System	Windows XP/Vista/7/8(Windows RT is not included) Mac OSX 10.7/10.8 Android 2.2 and above(MobiShow/WiFi-Doc/SidePad Receiver), iOS 3.2 and above (MobiShow/WiFi-Doc/SidePad Receiver)
Power	External Power adaptor 5V DC input 2.6A
Interface	15Pin VGA USB Host x 3 (Front x2, Rear x1) HDMI RJ-45 LAN Port Stereo Phone Jack Reset Button
Certificate	FCC/CE
Warranty	1 year

Model name	Sync Tab
Solution	Wireless 2.4G RF
Active area	5"*3"
Macro key	N/A
Report rate	165rps
Hot key	N/A
LCD	N/A
Multi user	N/A
Size	194*190*18.5mm
Pen tray	Yes
Pen type	Battery pen
Pen battery	AAA*1
Resolution	2000 pi
Pen pressure	1024 levels
Battery type	AA *2
Battery life	50hrs
Power consumption	35mA
Power source	Battery
Power button	Mechanical button
Weight	359g
Hand held belt	N/A

To discover more about Genee World's range of visualisers, interactive touchscreens, audience response systems and software you can view our online catalogue at www.geneeworld.com.



01902 390878



enquiries@geneeworld.com



www.geneeworld.com